

# DUMP-LOK

Every year, serious injuries and fatalities occur in the workplace when unsecured dump beds fall on workers that are making repairs between the bed and frame. DUMP-LOK is a unique and simple solution that safely secures the dump bed, preventing injuries.

OSHA has issued a safety and health information bulletin to alert employers and workers about the hazards of falling dump truck beds. For example, a worker replacing the rear stabilizer bar on a tandem dump truck and was crushed when the hydraulic cylinder of the OE brace failed. An employee greasing the U-Joints of a 1970 dump truck ultimately died from injuries sustained when the wood planks propping up the dump bed were dislodged. These types of tragedies can be prevented by safely securing the bed with DUMP-LOK during service and repairs.



DUMP-LOK is a product of Worksafe USA, Inc. Visit our website to learn more about Worksafe USA and see all the products we offer.

**WORKSAFE USA**  
WORKSAFE USA, INC.

Distributed by:

Worksafe USA, Inc.  
3071 Hamlin Parkway  
Springfield, IL 62711  
[www.worksafeusainc.com](http://www.worksafeusainc.com)

For sales, general inquiries, technical support or to become a DUMP-LOK dealer contact:

Mike Krall  
Cell: 217-891-1674  
Email: [mike@dump-lok.com](mailto:mike@dump-lok.com)

**DUMP-LOK**  
MADE IN THE USA

# DUMP-LOK

U.S. Patent #6905174

**SAFELY PREVENT INJURIES &  
FATALITIES FROM UNSECURED  
DUMP BEDS.**



A PRODUCT OF  
**WORKSAFE USA**  
WORKSAFE USA, INC.



# INSTALLATION INSTRUCTIONS

- With wheels chocked and empty dump bed raised to the appropriate height, set driver side (left) DUMP-LOK on truck frame, pushing firmly so the top and bottom plates are making full contact with both frames.
- Place safety chain over the bed frame or under the truck frame. Slide chain through key slot hole. Tighten and lock chain in the small end of the slot. Repeat procedure for passenger side.
- Slowly and carefully lower the dump bed to secure DUMP-LOK.




DO NOT "POWER DOWN" THE DUMPBOX!

# SPECIFICATIONS

	DL-105 WT "Shorty"	DL-105 FT "Shorty"	DL-105 WT	DL-105 FT	DL-106 WT	DL-106 FT
Overall Height	18.00"	17.00"	21.00"	20.00"	21.00"	20.00"
Overall Width	5.25"	5.25"	5.25"	5.25"	7.00"	7.00"
Overall Length	12.75"	12.75"	12.75"	12.75"	12.75"	12.75"
Maximum Truck Frame Width	4.4375"	4.4375"	4.4375"	4.4375"	6.00"	6.00"
Weight (Singles)	45 lbs.	45 lbs.	42 lbs.	42 lbs.	43 lbs.	43 lbs.
Maximum Capacity (Pairs)	50,000 lbs.	50,000 lbs.	50,000 lbs.	50,000 lbs.	50,000 lbs.	50,000 lbs.
Warranty on Manufacture Defects	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year

FT – Flat Top  
WT – Wide Top

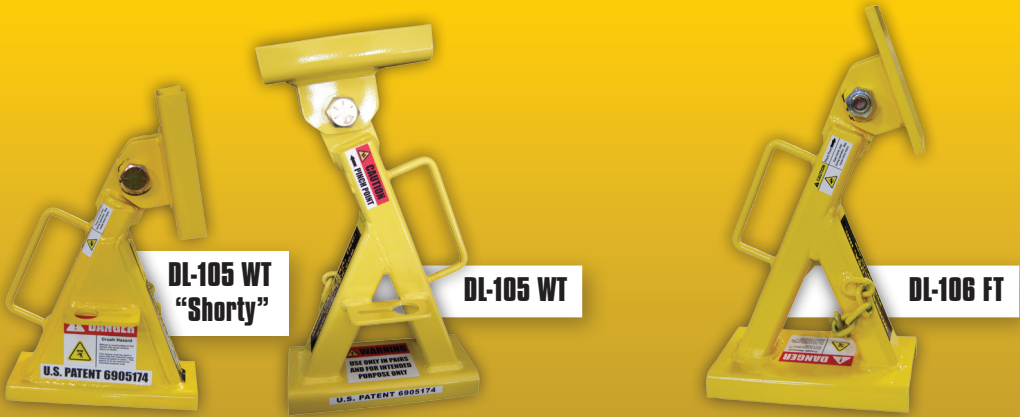

# SAFETY IN ACTION

